

## Prewash Alkaline Concentrated

### Standards

### Product specifications


o Specific weight: **1.14 -1.17**

o Colour: 

o pH: 

o Foaming: 

o Packaging:

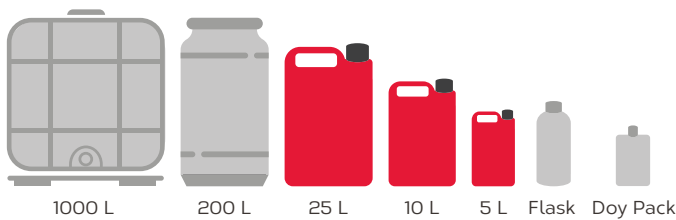

### Product description

The product is especially designed for the rim pre-wash step. Its descaling power and foaming properties ensure the highest quality.

### Storage

Keep tightly closed, avoiding exposure to UV rays and extreme temperatures.  
For more information, please read the safety data sheet.

### Directions for use

Product intended to thoroughly clean rims and eliminate traffic film.

Manual application: Dilute the product in a 10-15% maximum concentration with osmotized water. Do not ever exceed the maximum concentration.

Apply the product on rims and let it work for 2 minutes maximum.

Rinse with plenty of water.

Do not apply on vehicle areas where the product is not intended for.

### Material compatibility

| Materials           | 5 %            | 10 %           | 15 %           |
|---------------------|----------------|----------------|----------------|
| Stainless steel     | Compatible     | Compatible     | Compatible     |
| Unpainted aluminium | Not compatible | Not compatible | Not compatible |
| Galvanized steel    | Compatible     | Compatible     | Compatible     |
| Vehicle bodywork    | Compatible     | Compatible     | Compatible     |
| Rims                | Compatible     | Compatible     | Compatible     |

\*Compatibilities analyzed following the maximum recommended time and concentration.

## Prewash Alkaline Concentrated

